


CATENE NON UNIFICATE A PASSO METRICO A PERNI PIENI

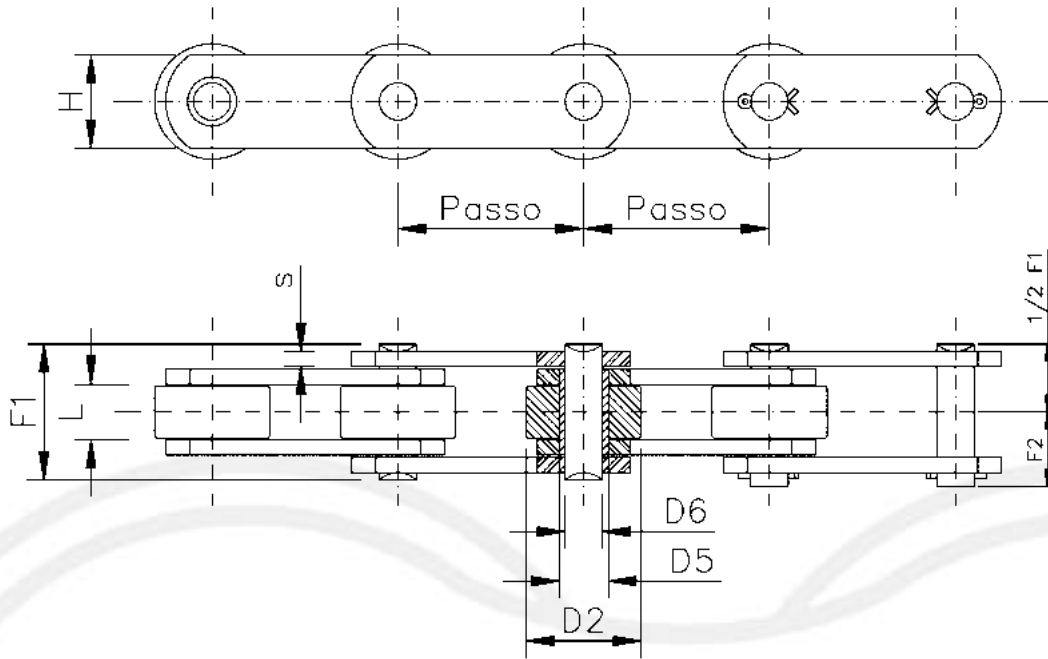

CATENA N°	Passo (mm)	Largh. Interna L	Diam. rullo D2	Diam. bussola D5	Diam. perno D6	Altezza piastra H	Spess. piastra s	Lungh. perno rib. F1	Lungh. perno g. F2	Carico di rottura (N)	Peso catena (kg/mt)
103	50	11,5	25	8,4	5,7	15	2	24,0	14,6	16.000	1,4
200	50	11,5	25	8,4	5,7	15	3	28,0	16,5	18.000	1,7
202	69	11,5	25	8,4	5,7	15	3	28,0	16,5	18.000	1,5
203	75	11,5	25	8,4	5,7	20	3	28,0	16,5	18.000	1,7
205	50	11,5	25	8,4	5,7	18	2,5	26,0	16	18.000	1,7
205SS	50	11,5	25	8,4	5,7	18	2,5	26,0	16	18.000	1,7
206	50	11,5	25	11,0	8	20	3	28,0	17	22.000	1,9
206SS	50	11,5	25	11,0	8	20	3	28,0	17	22.000	1,9
206R	50	11,5	25	11,0	8	20	3	28,0	17	45.000	1,9
400	50	15	31	13,2	10	23	3	33,0	19,5	35.000	3,0
400SS	50	15	31	13,2	10	23	3	33,0	19,5	30.000	3,0
402	100	15	31	13,2	10	23	3	33,0	19,5	35.000	2,3
500	50	15	31	13,2	10	25	4	36,0	21	45.000	3,9
500R	50	15	31	13,2	10	25	4	36,0	21	75.000	3,9
501	75	15	31	13,2	10	25	4	36,0	21	45.000	3,2
502	100	15	31	13,2	10	25	4	36,0	21	45.000	2,7
5021432	100	15	31	13,2	10	25	4	36,0	21	75.000	2,7
503	125	15	31	13,2	10	25	4	36,0	21	45.000	2,5
504	150	15	31	13,2	10	25	4	36,0	21	45.000	2,4
701	75	22	40	17,0	12	35	4	43,0	25	75.000	5,9
703	100	22	40	17,0	12	35	4	43,0	25	75.000	4,9
W1743	100	24	40	17,0	12	35	4	45,0	26	75.000	6,3
704	125	22	40	17,0	12	35	4	43,0	25	75.000	4,4
705	150	22	40	17,0	12	35	4	43,0	25	75.000	4,0

Ruote dentate a richiesta

VERSIONI ALTERNATIVE

- rulli in nylon, ecc.
- trattamenti superficiali di zincatura, nichelatura, ecc.
- pre-tensionate e pre-selezionate