




CATENE FLEYER SECONDO NORME ANSI – SERIE AL

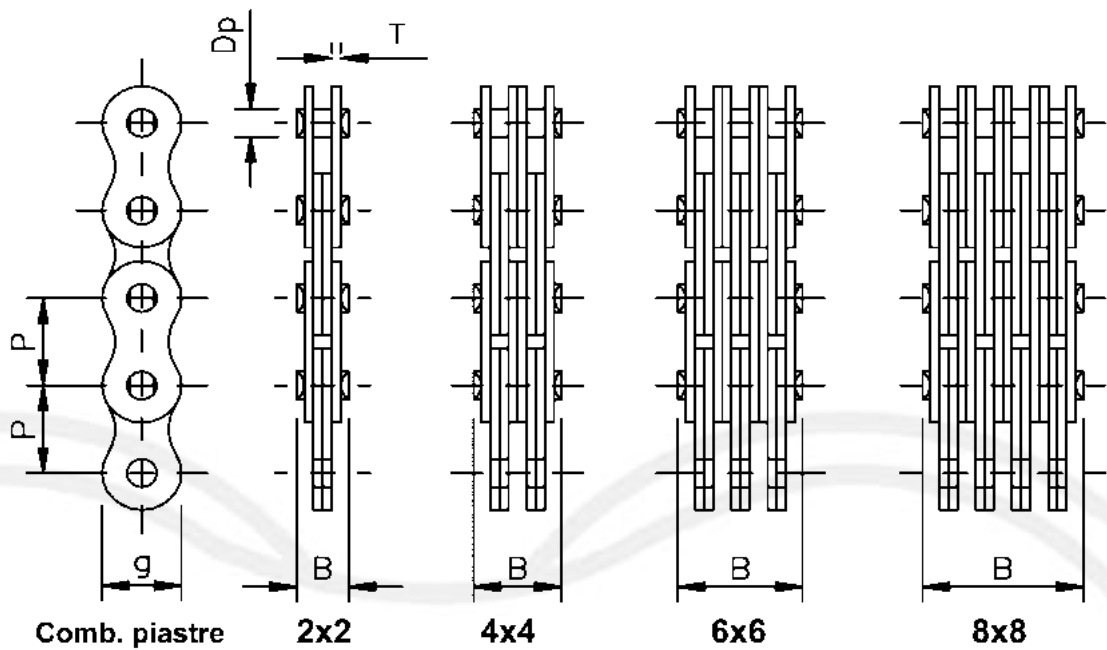

SERIE ISO	Passo (mm) p	Comp. piastre	Diametro perno Dp	Altezza piastre g	Spessore piastre T	Lungh. perno B	Carico di rottura min. (N)	Peso (kg/mt)
AL422	12,70	2x2	3,96	10,20	1,50	8,10	14.100	0,35
AL444		4x4				14,50	28.200	0,67
AL466		6x6				20,90	42.300	1,00
AL522	15,88	2x2	5,08	12,80	2,00	10,50	22.000	0,63
AL544		4x4				18,70	44.000	1,20
AL566		6x6				27,10	66.000	1,75
AL622	19,05	2x2	5,94	14,80	2,40	12,60	37.000	0,93
AL644		4x4				22,50	63.600	1,60
AL666		6x6				32,00	95.400	2,50
AL688		8x8				43,00	127.200	3,30
AL822	25,40	2x2	7,92	20,50	3,05	18,60	55.600	1,51
AL844		4x4				30,80	113.400	3,30
AL866		6x6				44,40	170.000	4,90
AL1022	31,75	2x2	9,53	25,70	4,00	21,30	82.400	2,40
AL1044		4x4				37,30	177.000	4,90
AL1066		6x6				54,00	265.500	7,30
AL1222	38,10	2x2	11,10	29,40	4,70	25,70	112.000	3,25
AL1244		4x4				44,50	224.000	6,42
AL1266		6x6				63,30	381.000	10,50
AL1288		8x8				83,00	508.000	14,00
AL1444	44,45	4x4	12,70	36,00	5,50	52,50	300.000	9,90
AL1466		6x6				74,50	558.000	13,00
AL1644	50,80	4x4	14,27	41,20	6,30	59,80	372.000	12,70
AL1666		6x6				85,00	642.000	18,00