


# CATENE FLEYER

## SECONDO NORME ISO 4347 – SERIE BL

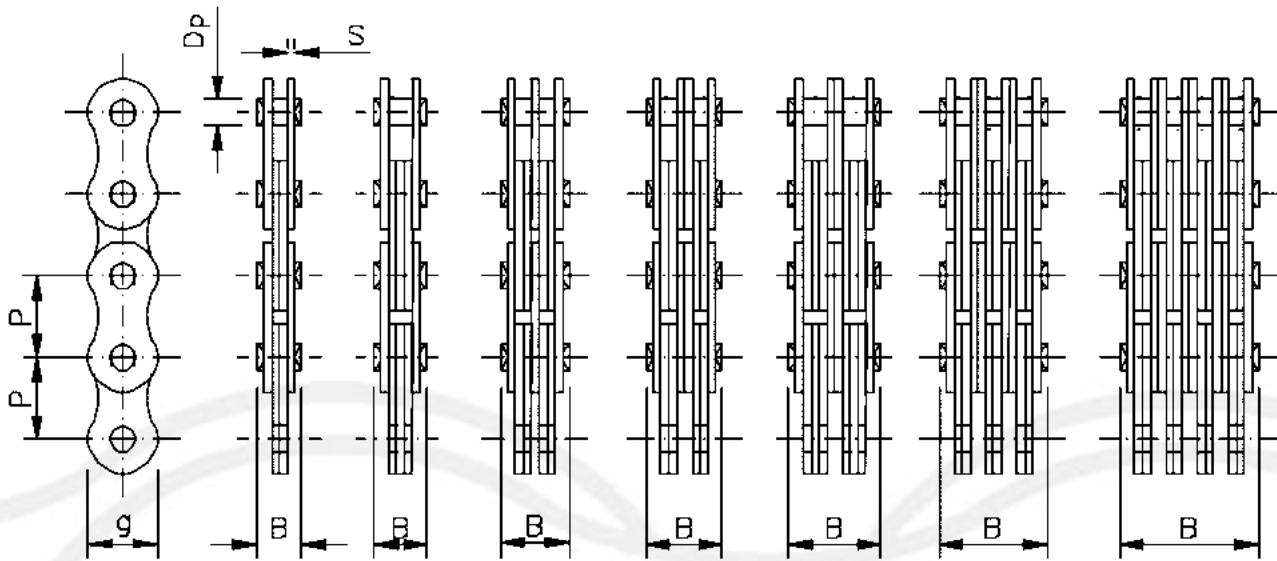

Comb. piastre 2x2 2x3 3x4 4x4 4x6 6x6 8x8

SERIE ISO	Passo (mm) p	Comp. piastre	Diametro perno Dp	Altezza piastre g	Spessore piastre T	Lungh. perno B	Carico di rottura min. (N)	Peso (kg/mt)
BL422	12,70	2x2	5,08	11,60	1,95	10,40	22.200	0,49
BL423		2x3				12,40	22.200	0,65
BL434		3x4				16,70	33.300	0,90
BL444		4x4				18,70	44.400	1,02
BL446		4x6				22,80	44.400	1,26
BL466		6x6				27,10	66.600	1,51
BL522	15,88	2x2	5,94	14,60	2,35	12,20	32.600	0,76
BL523		2x3				14,80	32.600	0,90
BL534		3x4				19,90	48.900	1,32
BL544		4x4				22,50	65.200	1,51
BL546		4x6				27,40	65.200	1,86
BL566		6x6				32,00	97.800	2,24
BL622	19,05	2x2	7,92	17,80	3,10	16,40	48.900	1,22
BL623		2x3				19,70	48.900	1,76
BL634		3x4				26,40	73.400	2,43
BL644		4x4				29,50	97.800	2,76
BL646		4x6				35,90	97.800	3,43
BL666		6x6				42,40	146.700	4,10
BL822	25,40	2x2	9,53	23,60	4,00	19,50	84.500	2,00
BL823		2x3				24,60	84.500	3,00
BL834		3x4				33,10	126.700	4,15
BL844		4x4				37,40	169.000	4,72
BL846		4x6				45,50	169.000	5,86
BL866		6x6				54,00	253.500	7,00