


CATENE FLEYER

SECONDO NORME ISO 4347 SERIE LL

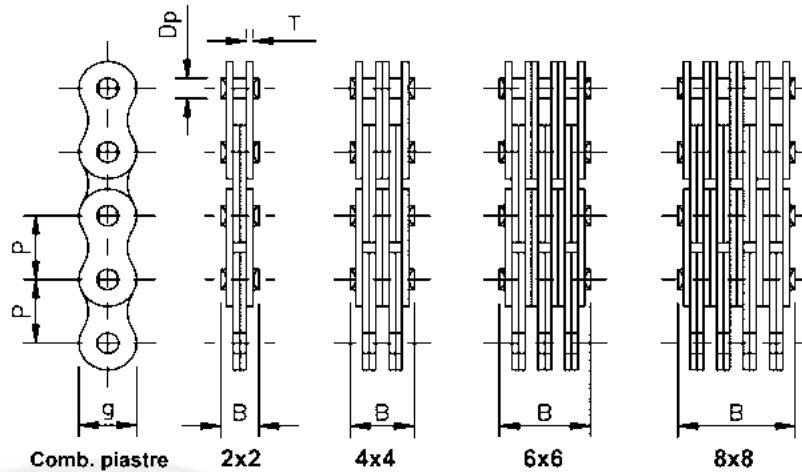

SERIE ISO	Passo (mm) p	Comp. piastre	Diametro perno Dp	Altezza piastre g	Spessore piastre T	Lungh. perno B	Carico di rottura min. (N)	Peso (kg/mt)
LL0822	12,70	2x2	4,45	10,20	1,50	7,90	17.800	0,39
LL0844		4x4				16,10	36.400	0,82
LL0866		6x6				23,40	54.600	1,20
LL1022	15,88	2x2	5,08	12,80	1,70	9,30	24.600	0,53
LL1044		4x4				14,90	45.400	0,94
LL1066		6x6				21,40	68.100	1,40
LL1222	19,05	2x2	5,72	16,13	1,90	10,70	30.900	0,63
LL1244		4x4				18,50	61.800	1,25
LL1266		6x6				26,30	92.700	1,86
LL1622	25,40	2x2	8,28	20,50	3,05	17,20	70.000	1,48
LL1644		4x4				29,10	116.000	2,80
LL1666		6x6				41,70	174.000	4,20
LL1688		8x8				54,80	232.000	5,20
LL2022	31,75	2x2	10,19	25,70	3,50	20,10	98.100	2,00
LL2044		4x4				33,30	190.000	4,20
LL2066		6x6				48,20	285.000	6,30
LL2088		8x8				63,20	380.000	8,40
LL2422	38,10	2x2	14,63	33,00	5,00	28,40	170.000	4,17
LL2444		4x4				46,90	340.000	8,20
LL2466		6x6				68,30	510.000	12,00
LL2488		8x8				89,70	680.000	16,30
LL2822	44,45	2x2	15,90	36,00	6,00	29,40	200.000	4,80
LL2844		4x4	15,90			54,70	400.000	9,50
LL2866		6x6	15,90			80,20	600.000	14,10
LL3222	50,80	2x2	17,81	41,20	6,30	31,80	260.000	6,20
LL3244		4x4				59,10	520.000	11,90
LL3266		6x6				85,40	780.000	17,80
LL3288		8x8				112,00	1.040.000	23,80
LL4022	63,50	2x2	22,89	48,00	8,00	39,50	360.000	9,20
LL4044		4x4				73,10	720.000	17,90
LL4066		6x6				106,50	1.080.000	26,60
LL4822	76,20	2x2	29,24	62,00	10,00	56,10	560.000	15,20
LL4844		4x4				91,20	1.120.000	29,60
LL4866		6x6				131,00	1.680.000	44,00